

WelchAllyn®



Welch Allyn  
SureTemp® Plus 690 Electronic Thermometer



Taking temperatures is easier, safer and more accurate—so taking care of all your patients is more convenient.

# The SureTemp Plus 690—with the speed and accuracy you require and the versatility you need for use with all your patients, all the time.

1

## Easy:

An easy-to-read LCD display with flashing icons that clearly communicate in any language, and an intuitive user interface and ergonomic shape

2

## Safe:

Patient safety is improved thanks to an interchangeable probe well that helps reduce risk of cross-contamination

3

## Fast and Accurate:


In addition to improved accuracy, the SureTemp Plus 690 is one of the fastest thermometers on the market, providing approximately 4-6 second oral readings, 10-13 second pediatric axillary and rectal readings and 12-15 second adult axillary readings.

4

## Versatile:

To top it all off, you can now use the SureTemp Plus 690 with all your patients, from infants to adults—whether you need to take oral, axillary or rectal temperatures

- Easy-to-use, intuitive operation
- Interchangeable oral/axillary and rectal probe wells help reduce the risk of cross-contamination

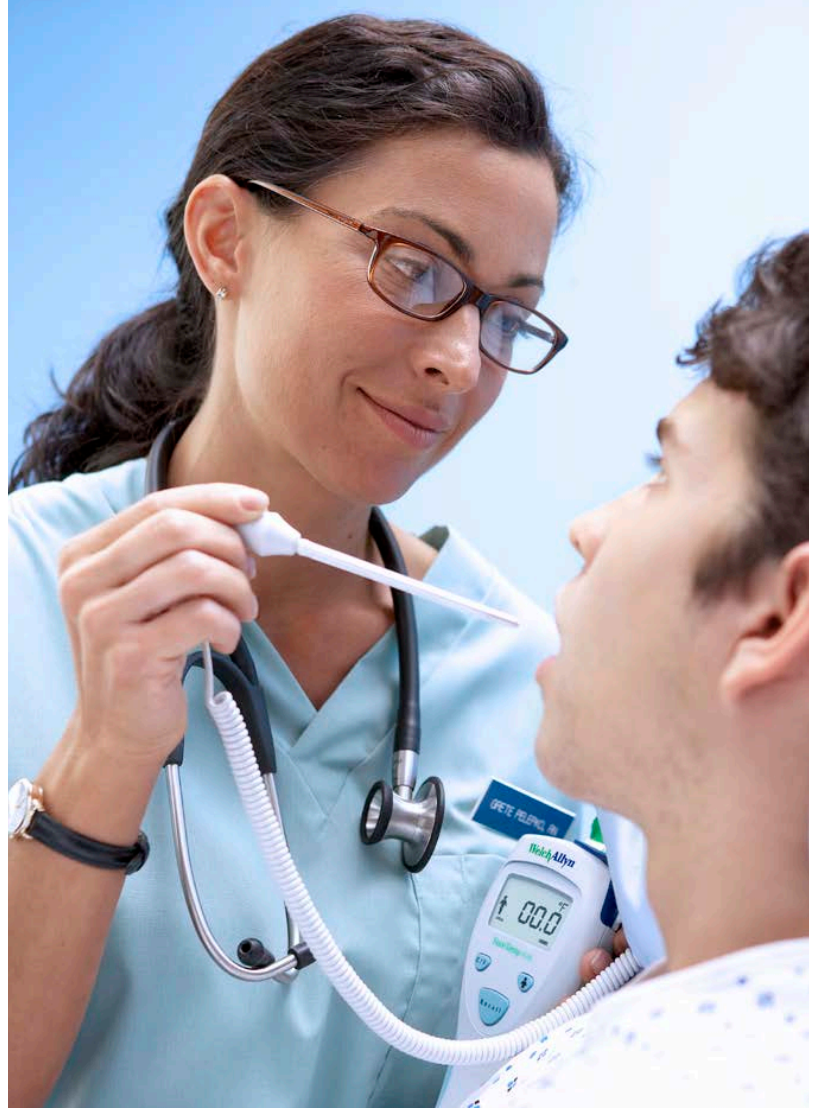

## The SureTemp Plus 690

Removable probe well for easy cleaning

User-selectable icon and/or words for identification of thermometer mode

C/F button for toggling between Fahrenheit and Celsius

Prominent recall button for display of last temperature taken

Ergonomic design with rubberized grips

Convenient storage for 25 probe covers

Large, easy-to-read LCD

Battery life indicator

Mode button for selecting oral, pediatric axillary or adult axillary



The **SureTemp Plus 690** with optional wall mount has storage space for 50 additional probe covers.

# The SureTemp Plus 690 setting the standard of care even higher

SureTemp Plus 690 Product Specifications	
Calibration Accuracy	±0.2 °F (±0.1 °C) (Monitor Mode)
Temperature Predict Time	Oral: Adult Axillary (18 years and older): Approximately 47 seconds Pediatric Axillary (17 years and younger): Approximately 1215 seconds Rectal: Rectal: Approximately 1013 seconds
Unit Dimensions	8.46" x 3.18" x 2.43" (215 mm x 81 mm x 62 mm)
Weight	12 oz (357 g)
Ambient Temperature Range	50.0 °F (10 °C) to 104 °F (40.0 °C)
Patient Temperature Range	80.0 °F (26.7 °C) to 110 °F (43.3 °C)
Power Source	(3) 1.5 Vdc AA batteries
Battery Life	Approximately 6,000 temperatures

## Ordering Information:

### THERMOMETERS

- 01690200** SureTemp Plus 690 Electronic Thermometer, Oral Probe and Oral Probe Well with 4 ft cord
- 01690201** SureTemp Plus 690 Electronic Thermometer, Rectal Probe and Rectal Probe Well with 4 ft cord
- 01690300** SureTemp Plus 690 Electronic Thermometer, One per room, Wall Mount, Oral Probe and Oral Probe Well with 9 ft cord (must be locked to the wall)
- 01690301** SureTemp Plus 690 Electronic Thermometer, One Per Room, Wall Mount, Rectal Probe and Rectal Probe Well with 9 ft cord (must be locked to the wall)
- 01690400** SureTemp Plus 690 Electronic Thermometer, Wall Mount, Oral Probe and Oral Probe Well with 4 ft cord
- 01690700** SureTemp Plus 690 Electronic Thermometer, Oral Probe and Oral Probe Well with 9 ft cord, with Rolling Stand and Holder for Spare Probe & Well

### ACCESSORIES

- 213260000** Wall Holder
- 213300000** Holder for Spare Probe and Well
- 061380000** Calibration Key Assembly, 690/692
- 028920000** Probe and Well Kit, 4ft, Rectal
- 028921000** Probe and Well Kit, 9ft, Rectal
- 028930000** Probe and Well Kit, 4ft, Oral
- 028931000** Probe and Well Kit, 9ft, Oral
- 028910000** Probe Well, Blue
- 028911000** Probe Well, Red
- 082730000** Thermometer Stand with Holder for Spare Probe and Well
- 213330000** Bracket, M600 Stand Upgrade, with Holder for Spare Probe and Well
- 980240000** Extended Warranty M690

### REPLACEMENT PROBE COVERS

- 05031001** Case of 1,000 Probe Covers

Contact your Welch Allyn representative or visit [www.welchallyn.com](http://www.welchallyn.com) to learn more.



Welch Allyn, Inc.  
 4341 State Street Road  
 Skaneateles Falls, NY 13153 USA  
 (p) 800.535.6663 (f) 315.685.3361