

# MICROFLEX®


## ▲ ULTRASENSE® EC



BLUE  
NITRILE  
NON-STERILE  
AMBIDEXTROUS  
TEXTURED FINGERS  
EXTENDED BEADED CUFF  
FOR SINGLE USE ONLY  
NON-LATEX

### POWDER-FREE EXTENDED CUFF EXAMINATION GLOVES

UltraSense® EC provides reliable barrier protection with enhanced tactile sensitivity, better grip and extended coverage of the wrist and forearm. UltraSense® EC gloves have a non-stick surface that prevents tapes and adhesives from sticking.

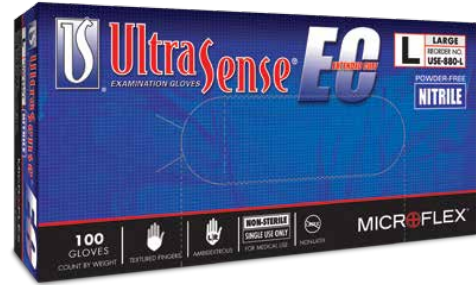

- Thinner at the fingertip and palm, yet one of the strongest, most durable gloves available
- Non-stick properties resists tape and adhesives
- Textured fingertips for a good grip



PACKAGED IN BOXES OF 100 FOR BETTER VALUE

PRODUCT CODE		PACKAGING	
XS	USE-880-XS	100	Gloves/Box
S	USE-880-S	10	Boxes/Case
M	USE-880-M		
L	USE-880-L		
XL	USE-880-XL		
XXL	USE-880-XXL		
XXXL	USE-880-XXXL		

GLOVE PROFILE		ASTM D 6319	ULTRASENSE® EC
Length	mm (inches)	min. 220 (8.7)	290 (11.4)
Cuff Thickness	mm (mils)	n/a	0.07 (2.8)
Palm Thickness	mm (mils)	min. 0.05 (2.0)	0.09 (3.5)
Finger Thickness	mm (mils)	min. 0.05 (2.0)	0.12 (4.7)
Tensile Strength	Before Aging	min. 14	33
	After Aging	min. 14	32
Elasticity/Elongation	Before Aging	min. 500	500
	After Aging	min. 400	400
Pinhole Defect Rate*	(AQL)	max. 2.5	1.5

\* Pinhole Defect Rate is FDA minimum requirement.



RECOMMENDED INDUSTRIES